




CREATIVE  
INTERCONNECT  
SOLUTIONS

# EN 4165

QUALIFIED

# OPTIMUS

BY NICOMATIC  
& CUSTOMIZED  
SOLUTIONS

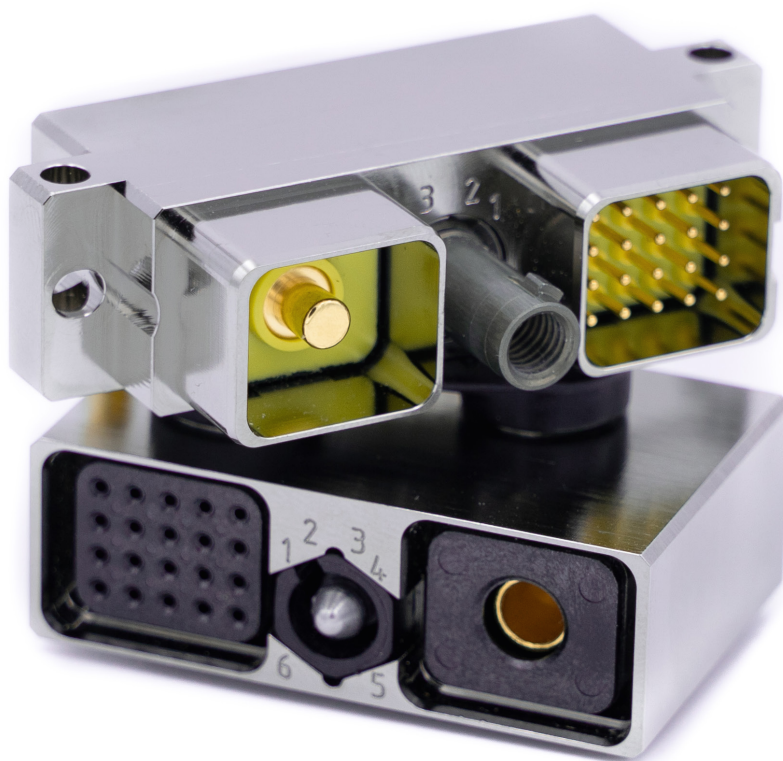

MODULAR – COMPACT – ROBUST – SEALED  
FROM FULL STANDARD TO FULL CUSTOM

—  
CONNECT  
FURTHER

## OUR CORE VALUE

FAMILIAR OR  
NEW TO THE  
PRODUCT  
LINE,  
DISCOVER  
NICOMATIC  
SOLUTIONS,  
BEYOND  
PERFOR-  
MANCE.

TOGETHER  
WE'LL FIND  
THE BEST  
SOLUTION

WE ARE NICOMATIC

Creative interconnect solutions provider

## SUMMARY

|                               |    |
|-------------------------------|----|
| MAIN FEATURES                 | 04 |
| MAIN APPLICATIONS             | 06 |
| PRODUCT SPECIFICATIONS        | 08 |
| PRODUCT CODIFICATION          | 12 |
| LINKING TECHNOLOGY AND PEOPLE | 14 |
| OPTIMUS CUSTOMIZED SOLUTIONS  | 15 |

# MODULAR BY NATURE

---



NICOMATIC



CREATIVE  
INTERCONNECT  
SOLUTIONS



PROTECT WHAT  
MATTERS

# EN 4165

## MEET THE STANDARD

Recognized for over 30 years for its miniaturized rectangular connectors, it is a natural progression for Nicomatic to now expand its product range further with a new connector, still rectangular, but this time standardised to address increasingly harsh environments. Our modular solutions meet the EN4165 standard and are also developed in accordance with the ARINC 809 committee, which is a standard developed for the civil aviation market. Branded under the Optimus name, our connectors are compliant with EN 4165 standards (details available on our website).



INDUSTRY  
LEADING  
LEAD TIMES

THINK  
ABOUT

...

OUTSIDE  
THE BOX  
RACK  
& PANEL

A modular solution optimized for PCB and panel connection in weight and space constrained applications.

**RECTANGULAR I/O**

Based on EN4165 standard /  
Sealing / EMI protection

**FULLY INTERMATEABLE  
& INTERCHANGEABLE**

With existing EN 4165 solutions

**PCB ADAPTED**

Direct connection to mother board /  
Efficient PCB fixing

**SPACE SAVING**

Slim fit & high density compared  
to circular connectors

**STACKABLE**

Possibility to pile up connectors

**RACK & PANEL**

Robust blind mating / Re-alignment



**EASY MAINTENANCE**

Removable contacts and modules

**AS / EN 9100**

Aerospace quality standards

## → ANATOMY OF A STANDARD EN 4165

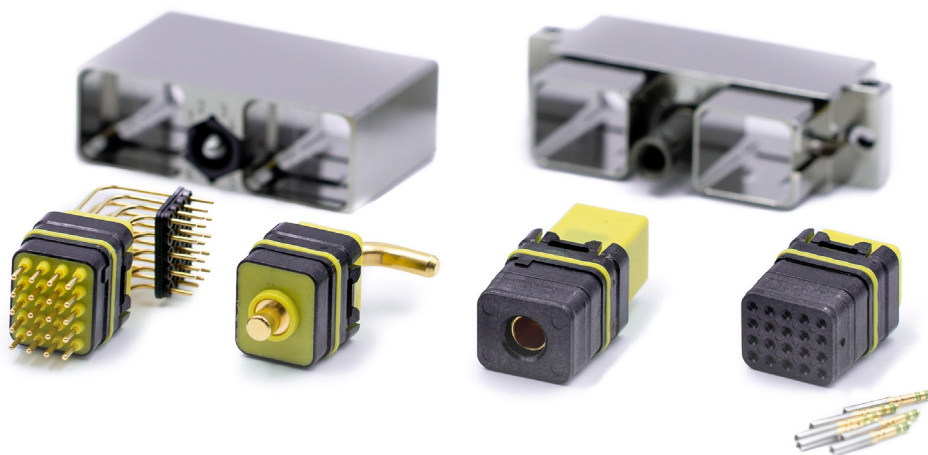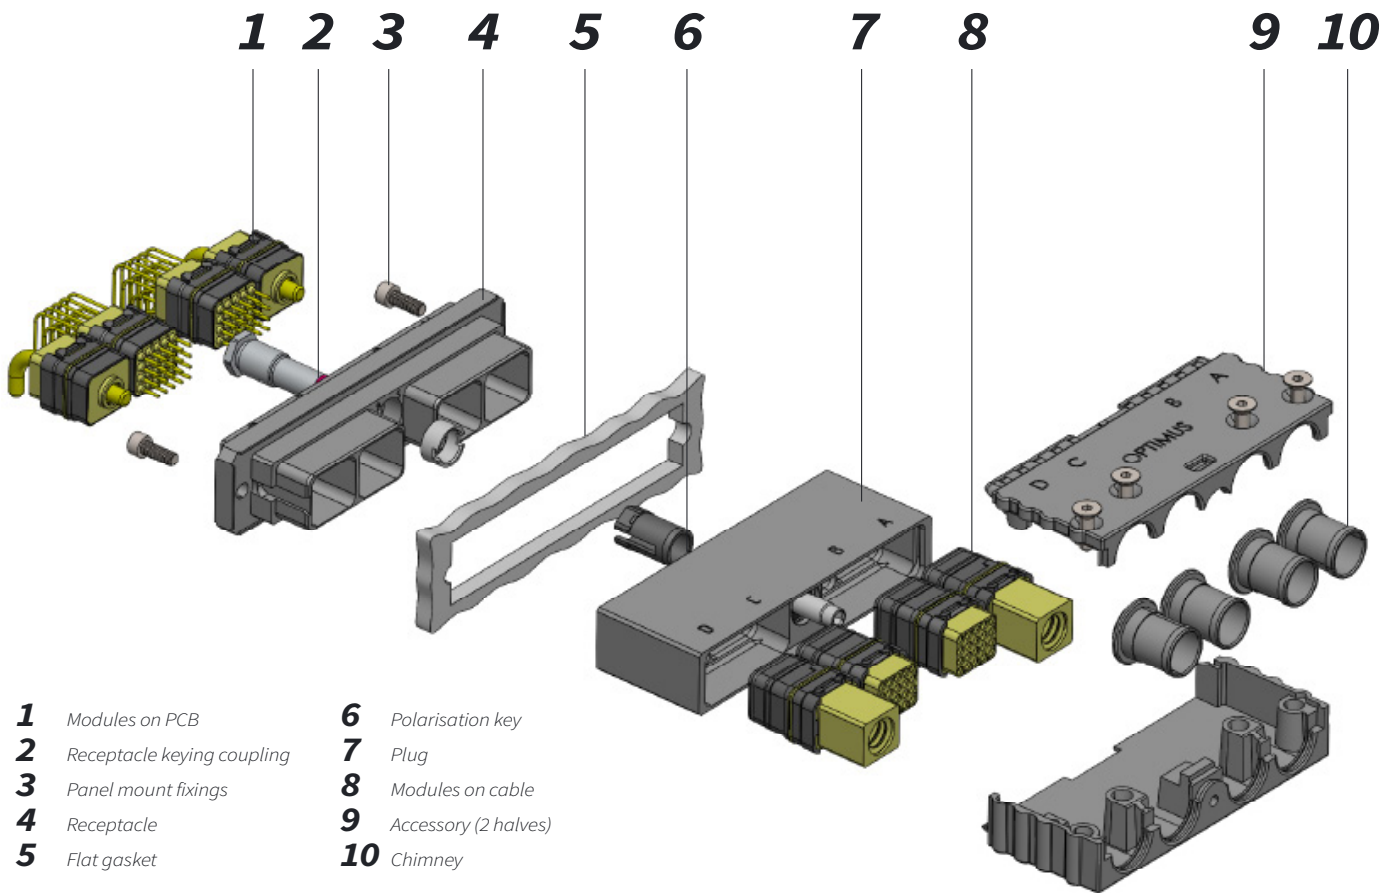

# Main applications

EN 4165 STANDARD / *Harsh environment requirements*



## → CIVIL AEROSPACE



EN 4165 norm



Modularity



Easy maintenance



## → **MILITARY VEHICLES**



*Robustness*



*Data reliability*



*Modularity*



## → **DEFENCE AVIONICS**




*High vibration*



*Space saving*



*Modularity*

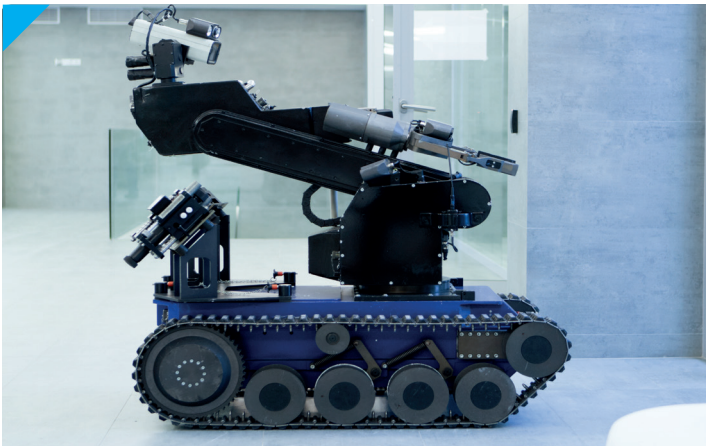

## → **ROBOTICS**



*Shock resistance*



*Space saving*





*Modularity*

YOUR  
APPLICATION  
DOESN'T  
APPEAR?

WE HAVE  
THE  
SOLUTION

EN 4165\_OPTIMUS  
IS A HIGHLY VERSATILE  
CONNECTOR

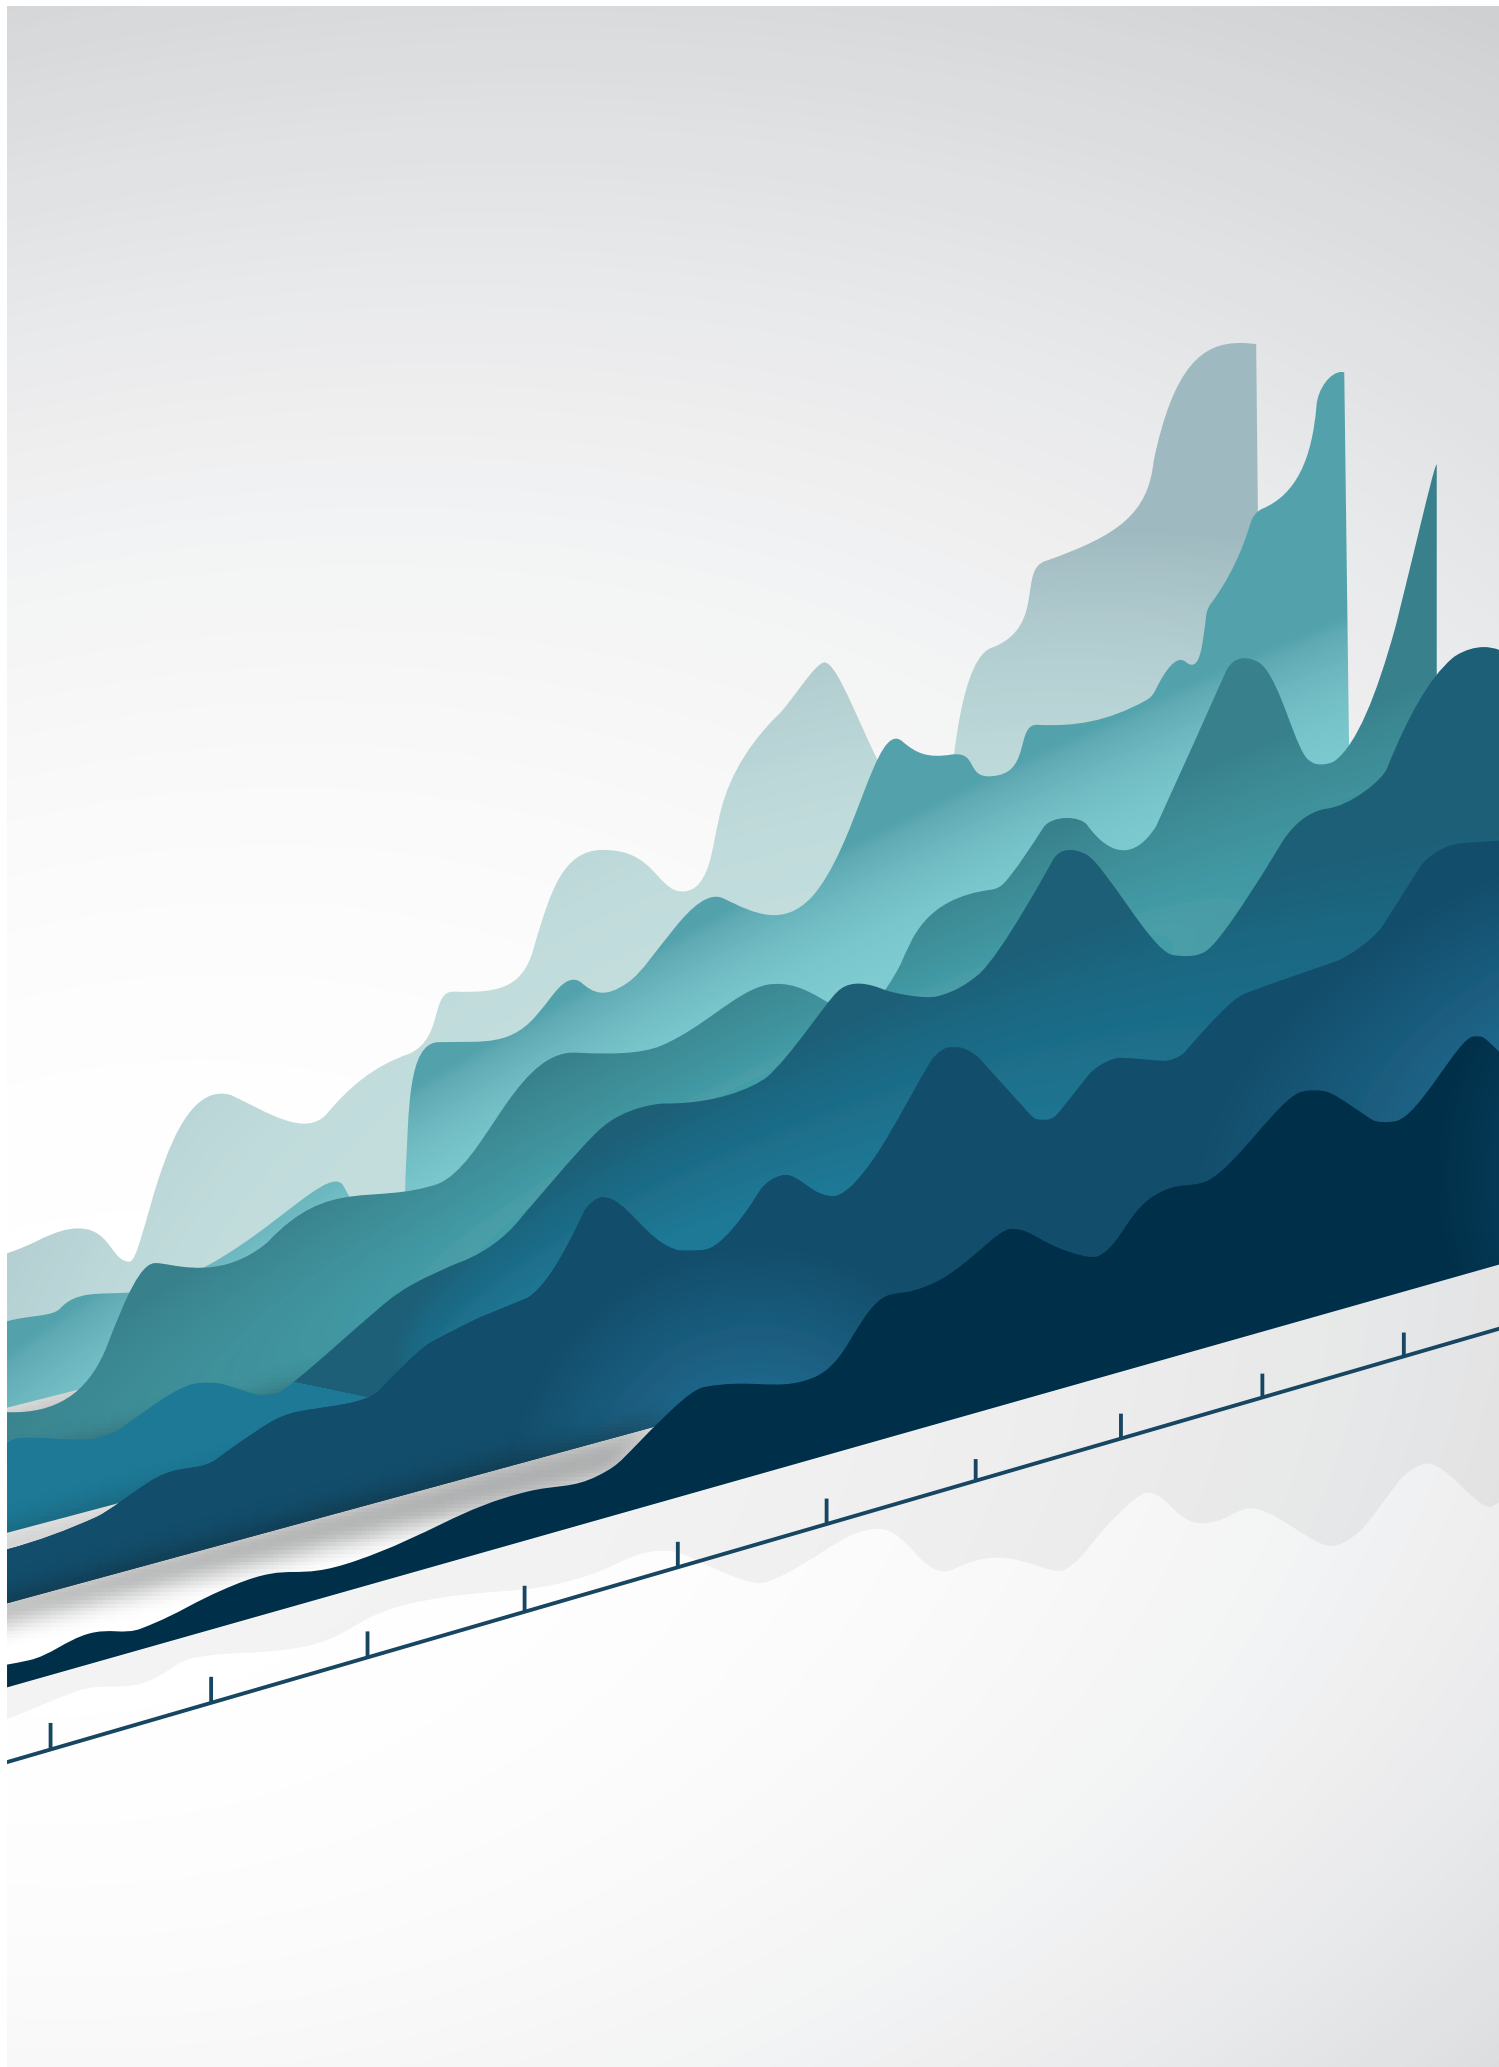

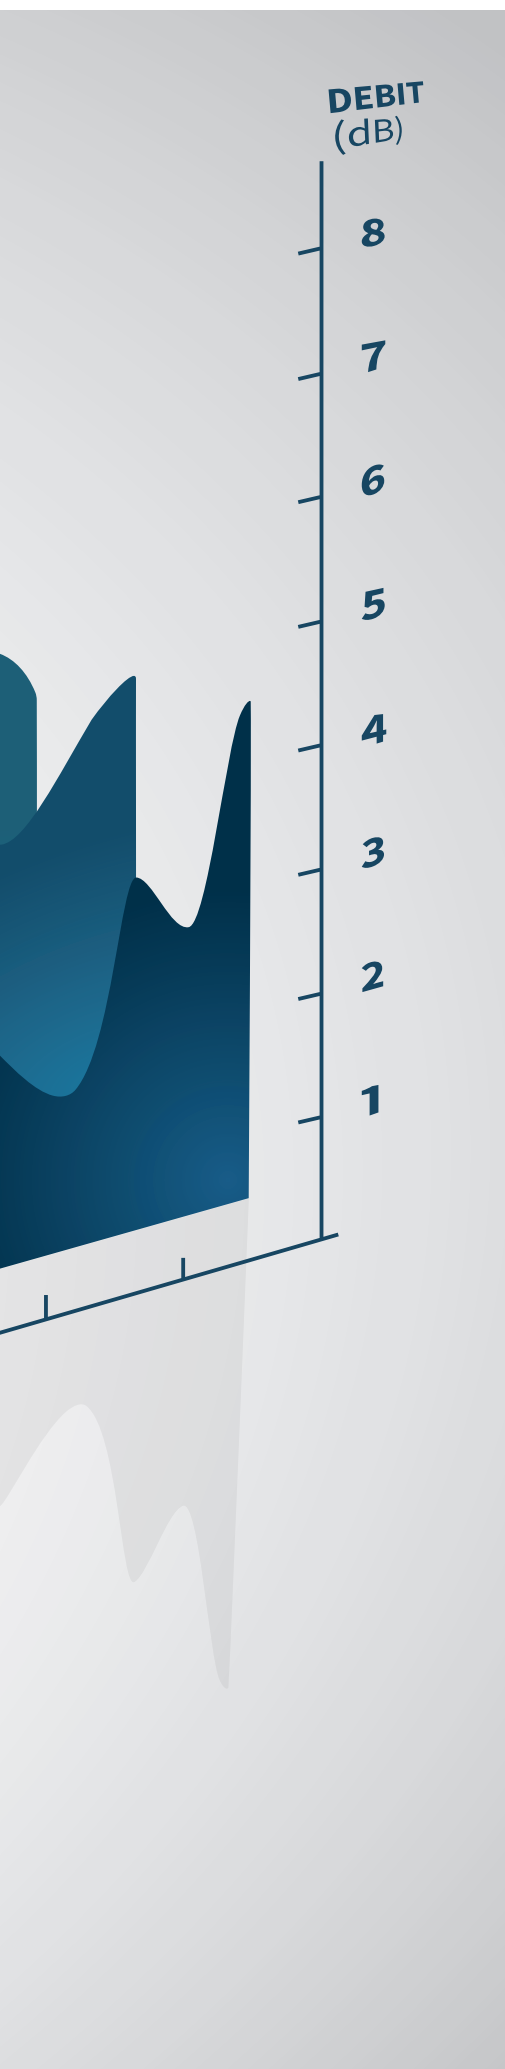

# PRODUCT SPECS

ACCORDING TO

EN 4165  
PERFORMANCES

**ALL OUR  
ENGINEERS  
SUPPORT YOU**

*We bring you concrete tips.  
Saving time, more gains,  
less stress.*



| Performance                                                                                                                                                                                                                                                          |  | Results                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |                         |                                  |                                  |                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|----------------------------------|----------------------------------|------------------------------|
| Electrical performance requirements                                                                                                                                                                                                                                  |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         |                                  |                                  |                              |
| Contact resistance low level<br>EN2591-201                                                                                                                                                                                                                           |  | For shunted modules<br>8 mΩ initial<br>Rc < 12 mΩ after test                                                                                                                                                                                                                                                                                                                                                                                                                                                  |                         |                                  |                                  |                              |
| Contact resistance @ rated current<br>EN2591-202                                                                                                                                                                                                                     |  | For shunted modules, In = 5A :<br>8 mΩ initial<br>Rc < 12 mΩ after test                                                                                                                                                                                                                                                                                                                                                                                                                                       |                         |                                  |                                  |                              |
| Discontinuity of contacts in the microsecond range<br>EN2591-204<br>Method B                                                                                                                                                                                         |  | Standard contact: ≤ 1 μs                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |                         |                                  |                                  |                              |
| Electrical continuity of the shell<br>EN2591-205                                                                                                                                                                                                                     |  | <div>- Between mated connectors:<br/>Class F: 1 mΩ initial; 2 mΩ after test<br/>Class W: 2.5 mΩ initial; 5 mΩ after test</div> <div>- Between shell and grounding contacts: 10 mΩ initial; 20 mΩ after test</div> <div>- Between end of chimney and backshell:<br/>Class F: 2 mΩ initial; 4 mΩ after test<br/>Class W: 2.5 mΩ initial; 5 mΩ after test</div> <div>- Between backshell and plug (or receptacle):<br/>Class F: 1 mΩ initial; 2 mΩ after test<br/>Class W: 2.5 mΩ initial; 5 mΩ after test</div> |                         |                                  |                                  |                              |
| Insulation resistance<br>EN2591-206<br>Method A                                                                                                                                                                                                                      |  | <div>- @ Ambient temperature: 5 000 MΩ (unmated connectors);</div> <div>- @ Maximum operating temperature: 1 000 MΩ (unmated connectors);</div> <div>- After tests EN 2591-314, and during EN 2591-324: 1 000 MΩ (mated connectors);</div> <div>- After tests EN 2591-315: 1 000 MΩ (unmated connectors) except conductive fluids;</div> <div>- During tests EN 2591-301: 100 MΩ (mated connectors).</div>                                                                                                    |                         |                                  |                                  |                              |
| Temperature rise due to rated current<br>EN2591-208                                                                                                                                                                                                                  |  | Applicable for shunted modules only: In = 5 A and Δθ°C ≤ 40 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                |                         |                                  |                                  |                              |
| Surface transfer impedance<br>EN2591-212<br>Initial and after tests ; connector mated with accessories                                                                                                                                                               |  | 1 KHz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 1 Mhz                   | 10 Mhz                           | 100 Mhz                          |                              |
|                                                                                                                                                                                                                                                                      |  | 5 mΩ                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | 10 mΩ                   | 20 mΩ                            | 150 mΩ                           |                              |
| Shielding effectiveness from 100 MHz to 1 GHz<br>EN2591-213<br>Initial and after tests ; connector mated with accessories                                                                                                                                            |  | Frequency<br>Mhz                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                         | Minimum attenuation (dB)         |                                  |                              |
|                                                                                                                                                                                                                                                                      |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         | Classes J, M, F and W            |                                  |                              |
|                                                                                                                                                                                                                                                                      |  | 100                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                         | 50                               |                                  |                              |
|                                                                                                                                                                                                                                                                      |  | 200                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                         | 45                               |                                  |                              |
|                                                                                                                                                                                                                                                                      |  | 300                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                         | 45                               |                                  |                              |
|                                                                                                                                                                                                                                                                      |  | 400                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                         | 40                               |                                  |                              |
|                                                                                                                                                                                                                                                                      |  | 800                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |                         | 35                               |                                  |                              |
| 1 000                                                                                                                                                                                                                                                                |  | 30                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |                         |                                  |                                  |                              |
| Lightning strike, current and voltage pulse<br>EN2591-214<br>Not applicable for class C                                                                                                                                                                              |  | Classes F and W: Current pulse F                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                         |                                  |                                  |                              |
| Voltage proof<br>EN2591-207<br>Method A                                                                                                                                                                                                                              |  | Max. leakage current                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Pressure                | Connectors                       |                                  |                              |
|                                                                                                                                                                                                                                                                      |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         | Mated<br>V r.m.s.                | Unmated<br>V r.m.s.              |                              |
|                                                                                                                                                                                                                                                                      |  | 2 MA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Sea level               | (size 22) 1 300<br>(other) 1 500 | (size 22) 1 300<br>(other) 1 500 |                              |
|                                                                                                                                                                                                                                                                      |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 12,1 kPa (15 000 m)     | 1 000                            | 600                              |                              |
|                                                                                                                                                                                                                                                                      |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | 4,7 kPa (21 000 m)      | 1 000                            | 400                              |                              |
| 1,1 kPa (30 000 m)                                                                                                                                                                                                                                                   |  | 1 000                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                         | 200                     |                                  |                                  |                              |
| Mechanical performance requirements                                                                                                                                                                                                                                  |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         |                                  |                                  |                              |
| Engagement of contacts<br>EN2591-216                                                                                                                                                                                                                                 |  | Applicable ≥ 1,27 mm (only for standard contact)                                                                                                                                                                                                                                                                                                                                                                                                                                                              |                         |                                  |                                  |                              |
| Transverse load (external bending moment)<br>EN2591-404                                                                                                                                                                                                              |  | 2 and 4 modules classes F, W<br>Torque N.m Force rear plug: 50; Torque N.m rear accessory: 14                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |                                  |                                  |                              |
| Mechanical endurance<br>EN2591-406<br>The rate shall not exceed five cycles/min.                                                                                                                                                                                     |  | Number of mating and unmating operations: 500                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |                                  |                                  |                              |
| Durability of contact retention system and seals (Maintenance ageing)<br>EN2591-407                                                                                                                                                                                  |  | Applicable<br>50 cycles insertion/extraction for contacts in shunted modules                                                                                                                                                                                                                                                                                                                                                                                                                                  |                         |                                  |                                  |                              |
| Mating and Unmating forces<br>EN2591-408<br>Screw plug: Method A                                                                                                                                                                                                     |  | a) Mating and unmating of pairs of connectors                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |                         |                                  |                                  |                              |
|                                                                                                                                                                                                                                                                      |  | Housing size                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  | Coupling torque<br>N .m | Uncoupling torque<br>N .m        |                                  | Overtightening torque<br>N.m |
|                                                                                                                                                                                                                                                                      |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         | min.                             | max.                             |                              |
|                                                                                                                                                                                                                                                                      |  | 2 modules                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1,1                     | 0,7                              | 1,7                              | 3,00                         |
|                                                                                                                                                                                                                                                                      |  | 4 modules                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 1,3                     | 0,7                              | 2,2                              | 3,00                         |
| b) Self-locking system on the plugs only. The rotation torque of the coupling device in the uncoupling direction shall not be < 0,01 N.m during a 360° rotation. The ratio between the torque (uncoupling direction/coupling direction) shall not be less than 1,25. |  |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                         |                                  |                                  |                              |

| Performance                                                                                                                                            | Results                                                                                                                                                                                                                                                                                                                                    |                          |                            |                         |
|--------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------|----------------------------|-------------------------|
| <b>Contact retention in insert</b><br>EN2591-409<br>Preload: 1 daN<br>Displacement <0.3 mm during and afetr application load                           | Contact size 22: Axial load 44N<br>Contact size 20: Axial load 67N<br>Contact size16: Axial load 110N<br>Contact size 12: Axial load 110N<br>Contact size 8: Axial load 110N                                                                                                                                                               |                          |                            |                         |
| <b>Holding force of grounding spring system</b><br>EN2591-413<br>Not applicable on accessories and on push-pull latching mechanism                     | Gauge retention force, models W and F<br>2 modules: min 5 / max10<br>4 modules: min 10 / max 20                                                                                                                                                                                                                                            |                          |                            |                         |
| <b>Stability of male contact in module</b><br>EN2591-419                                                                                               | Contact size 22: Permitted deflection mm: 0.76 _ Force daN: 1.2<br>Contact size 20: Permitted deflection mm: 1.37 _ Force daN: 2.4<br>Contact size 16: Permitted deflection mm: 1.91 _ Force daN: 4.9<br>Contact size 12: Permitted deflection mm: 1.91 _ Force daN: 4.9<br>Contact size 8: Permitted deflection mm: 2.54 _ Force daN: 9.7 |                          |                            |                         |
| <b>Use of tools</b><br>EN2591-506                                                                                                                      | Force to be applied on tool: 13 N                                                                                                                                                                                                                                                                                                          |                          |                            |                         |
| Environmental performance requirements                                                                                                                 |                                                                                                                                                                                                                                                                                                                                            |                          |                            |                         |
| <b>Endurance @ temperature</b><br>EN2591-301<br>Method B, test under load                                                                              | Temperature: 175 °C<br>Duration: 1 000 h                                                                                                                                                                                                                                                                                                   |                          |                            |                         |
| <b>Climatic sequence</b><br>EN2591-302<br>EN2591-309 Dry Heat<br>EN2591-310 Cold<br>EN2591-311 Low air pressure<br>EN2591-321 - Damp heat, cyclic test | Minimum temperature: (- 55 ± 2) °C<br>Maximum temperature: (175 ± 2) °C                                                                                                                                                                                                                                                                    |                          |                            |                         |
| <b>Cold / low pressure and damp heat</b><br>EN2591-303                                                                                                 | Five cycles. Minimum temperature: (- 55 ± 2) °C                                                                                                                                                                                                                                                                                            |                          |                            |                         |
| <b>Rapid change of temperature</b><br>EN2591-305                                                                                                       | TA: 175 °C +5 -0<br>TB: -55 °C +0 -5                                                                                                                                                                                                                                                                                                       |                          |                            |                         |
| <b>Salt mist</b><br>EN2591-307                                                                                                                         | Classes W, J, M and C<br>- 50 cycles of mating and unmating at a rate five cycles/min;<br>- exposed to the salt mist:<br>- mated for 452 h*,<br>- then unmated for 48 h*;<br>- subjected to 200 cycles of mating and unmating at the rate five cycles/min<br>Model F<br>* mated for 96h                                                    |                          |                            |                         |
| <b>Sand and Dust</b><br>EN2591-308                                                                                                                     | Wind velocity in the duct: (3,5 ± 0,5) m/s<br>1 cycle                                                                                                                                                                                                                                                                                      |                          |                            |                         |
| <b>Air leakage</b><br>EN2591-312<br>Method A                                                                                                           | Differential pressure: 100 kPa<br>Maximum leakage flow: 4 cm3/h/module                                                                                                                                                                                                                                                                     |                          |                            |                         |
| <b>Immersion at low air pressure</b><br>EN2591-314                                                                                                     | Module size                                                                                                                                                                                                                                                                                                                                | Contact P/N              | Insulation resis-<br>tance | Leakage current         |
|                                                                                                                                                        | #16                                                                                                                                                                                                                                                                                                                                        | M39029/76<br>M39029/78   | 1 Ω min.<br>at 250 V       | 2 mA max.<br>at 750 V   |
|                                                                                                                                                        | #12                                                                                                                                                                                                                                                                                                                                        | M39029/28<br>M39029/27   | 1 GΩ min.<br>at 500 V      | 2 mA max.<br>at 1 000 V |
|                                                                                                                                                        | #8                                                                                                                                                                                                                                                                                                                                         | EN3155-068<br>EN3155-069 | 1 GΩ min.<br>at 500 V      | 2 mA max.<br>at 1 000 V |
| <b>Fluid resistance</b><br>EN2591-315                                                                                                                  | Table 39                                                                                                                                                                                                                                                                                                                                   |                          |                            |                         |
| <b>Flammability</b><br>EN2591-317<br>Connectors mated. Method A                                                                                        | Test applicable                                                                                                                                                                                                                                                                                                                            |                          |                            |                         |
| <b>Interfacial sealing</b><br>EN2591-324                                                                                                               | Pressure 1,1 kPa                                                                                                                                                                                                                                                                                                                           |                          |                            |                         |
| <b>Shock</b><br>EN2591-402<br>Method A                                                                                                                 | Severity 100<br>Number of shocks: one each way for each of the three directions (i.e. six shocks in total)                                                                                                                                                                                                                                 |                          |                            |                         |
| <b>Sinusoidal and random vibration</b><br>EN2591-403<br>Method B                                                                                       | Figure 3 and Table 2, level G<br>Duration: 8 h/axe on the three axis                                                                                                                                                                                                                                                                       |                          |                            |                         |
| <b>Magnetic permeability</b><br>EN2591-513                                                                                                             | < 2                                                                                                                                                                                                                                                                                                                                        |                          |                            |                         |
| <b>Mould growth</b><br>Method A                                                                                                                        | Duration: 28d, Growth: 0; No prior washing; No surface etching                                                                                                                                                                                                                                                                             |                          |                            |                         |

Best-in class  
sealing

As per EN2591

MODULE

Secured manufacturing

# A READY-TO-PLUG SEALED COMPONENT

Reliable connection

The module is at the heart of Optimus solutions: in a single component, it concentrates several high level functions for optimal performance in harsh environments.

Injected in one single operation, which increases reliability and the repeatability of the process, the silicone performs 3 main functions: the interfacial seal ensures a seal between mated modules and reduces arcing; the peripheral seal enables sealing between the module and its shell cavity; the rear grommet will compress around the wires and avoid any liquid ingress from the

harnesses. But that's not all: the module features moulded thermoplastic clips for high class contact retention, and an optimized module retention clip that makes the module able to fit in any adapted cavity: whether it is inside a standard Optimus, shell or directly in your equipment structure!

## → SOME OF OUR AVAILABLE MODULES

**01-08** : 1 contact size 8

**04-12** : 4 contacts size 12

**08-16** : 8 contacts size 16

**12-20** : 12 contacts size 20


**20-22** : 20 contacts size 22

**30-23** : 30 contacts size 23

**99-01** : 5 contacts size 22 + 6 contact size 16

**99-10** : 8 contacts size 20 + 2 contact size 16

**01Q28** : Quadrax

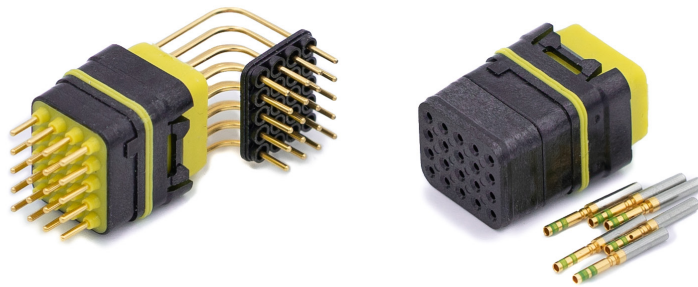

## → CODIFICATION RULES

### MODULES ON CABLE

AS39029/57 AND /58 AND EN3155 CONTACT COMPLIANT

|         | Series | Nbr-Size | Sealing               | Polarization  | Contact                                                                                        |
|---------|--------|----------|-----------------------|---------------|------------------------------------------------------------------------------------------------|
|         | A      | x-x      | 1: without<br>2: with | N, A, B, C, D | A: w/o male contact<br>B: w/o female contact<br>M: with male contact<br>F: with female contact |
| OPT     | A      | 20-22    | 2                     | N             | F                                                                                              |
| EN 4165 | A      | 20-22    | 2                     | N             | F                                                                                              |

### MODULES ON PCB

|     | Series | Nbr-Size | Sealing               | Polarization  | Gender              | Type                         | PCB thickness | Plating                |
|-----|--------|----------|-----------------------|---------------|---------------------|------------------------------|---------------|------------------------|
|     | A      | x-x      | 1: without<br>2: with | N, A, B, C, D | P: pin<br>S: socket | Y: straight<br>V: bended 90° | 3: 3.2 mm     | G: gold<br>T: tin RoHS |
| OPT | A      | 20-22    | 2                     | N             | P                   | V                            |               |                        |

# Shells

## 2 and 4 cavities

# ALUMINIUM & COMPOSITE

## ADAPTED SURFACE TREATMENT

Black Nickel: 96 hours Salt Spray .  
Olive Green Cadmium: 500 hours salt Spray.

## ALUMINIUM SHELL

Optimus receptacles and plugs are machined in aluminium 6061, the recommended alloy for aeronautical application.

## COMPOSITE SHELL

Looking for light weight solutions: check out our composite shells.

## → CODIFICATION RULES

|            | Surface Treatment                                                                                                                        | Type                                                                                             | Series   | Nbr cavities                                 | Polarization nut                                                               | Polarization nut position                       | Optional design for nut device                                                          | Panel gasket                                                                             |
|------------|------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------|----------|----------------------------------------------|--------------------------------------------------------------------------------|-------------------------------------------------|-----------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|
| RECEPTACLE | <b>F:</b> alu+black nickel<br><b>W:</b> alu+cadmium<br><b>N:</b> alu+nickel<br><b>M:</b> composite nickel<br><b>J:</b> composite cadmium | <b>0:</b> stackable<br><b>7:</b> flange<br><b>0S:</b> short stackable<br><b>7S:</b> short flange | <b>A</b> | <b>2:</b> 2 cavities<br><b>4:</b> 4 cavities | <b>A:</b> standard black<br><b>0:</b> without<br><b>1 to 6:</b> w, colour code | <b>0:</b> not mounted<br><b>1 to 6:</b> mounted | <b>None:</b> std design<br><b>A:</b> w. hex. groove for nut<br><b>B:</b> w. captive nut | <b>U:</b> w/o<br><b>M:</b> w. conductive elastomer<br><b>S:</b> Non conductive elastomer |
| EN 4165    | F                                                                                                                                        | 0                                                                                                | A        | 2                                            | 1                                                                              | 1                                               |                                                                                         |                                                                                          |
| OPT        | F                                                                                                                                        | 0                                                                                                | A        | 2                                            | 1                                                                              | 1                                               | A                                                                                       | U                                                                                        |

|         | Surface Treatment                                                                                                                        | Type                                                 | Series   | Nbr cavities                                 | Reverse fixing                                                          | Polarization nut                                                               | Polarization nut position                       |
|---------|------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------|----------|----------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------------------------|-------------------------------------------------|
| PLUG    | <b>F:</b> alu+black nickel<br><b>W:</b> alu+cadmium<br><b>N:</b> alu+nickel<br><b>M:</b> composite nickel<br><b>J:</b> composite cadmium | <b>6:</b> standard<br><b>9:</b> rack / rack reversed | <b>A</b> | <b>2:</b> 2 cavities<br><b>4:</b> 4 cavities | <b>Omit:</b> Standard<br><b>R:</b> only for rack reversed configuration | <b>A:</b> standard black<br><b>0:</b> without<br><b>1 to 6:</b> w, colour code | <b>0:</b> not mounted<br><b>1 to 6:</b> mounted |
| EN 4165 | F                                                                                                                                        | 6                                                    | A        | 2                                            |                                                                         | A                                                                              | 0                                               |
| OPT     | F                                                                                                                                        | 6                                                    | A        | 2                                            |                                                                         | A                                                                              | 0                                               |



Nicomatic also offers a large range of accessories, including backshells, covers, cable clamps and others: consult us to get the best combination for your need.

# LINKING TECHNOLOGY AND PEOPLE



Meeting the highest quality standards is a lifelong commitment for our company. Certified to EN 9100 and ISO 9001 since 2009, both our organisation and our quality system are continuously improved, driven by a network of men and women committed to always delivering the best service to our customers.

At the heart of this system is a dedication to innovation and performance optimisation. With the adoption of EN 4165, Nicomatic has mastered the challenge of combining state-of-the-art industrialisation within an agile and learning ecosystem. The know-how and commitment of our employees have enabled us to meet this challenge with ease. Our standard Optimus solutions are qualified and certified\* according to the EN 4165 standard.

*\*Further details can be found at [nicomatic.com](http://nicomatic.com)*

CONNECTION  
EMOTION  
HUMAN TO HUMAN




Overmolding capabilities, Nicomatic production site

QUALITY  
REPEATABILITY  
PRODUCTIVITY


# OPTIMUS / EXPLORING THE SPECIFIC

Particularly agile, autonomous in all techniques, Nicomatic continues to support you with many standard components that deliver a customised solution: Optimus, the superlative form of the Latin word bonus, the origin of the word “bon” meaning good in French, therefore honours its French origin and will delight those who remember “Transformers”: its uniqueness lies here, since the number of possible combinations is infinite.

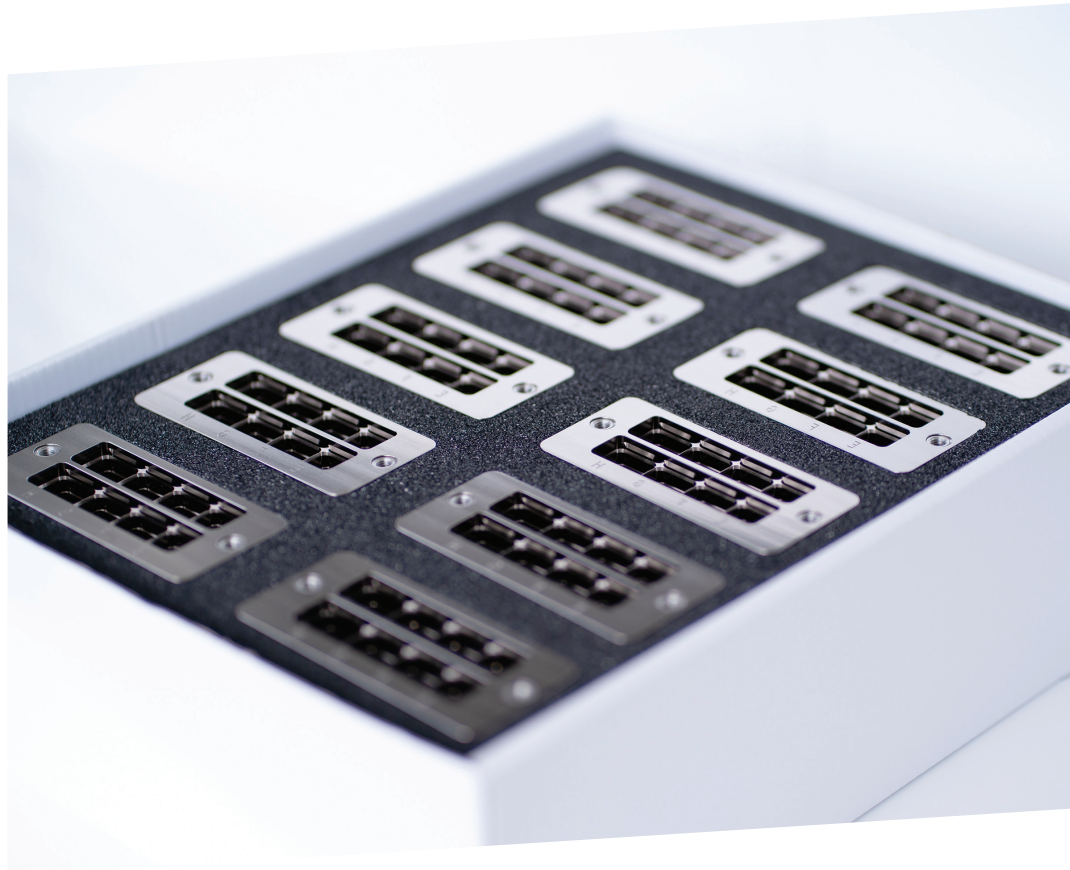

Standard cavities but custom shells...

## → ....INNOVATIVE TOUCH

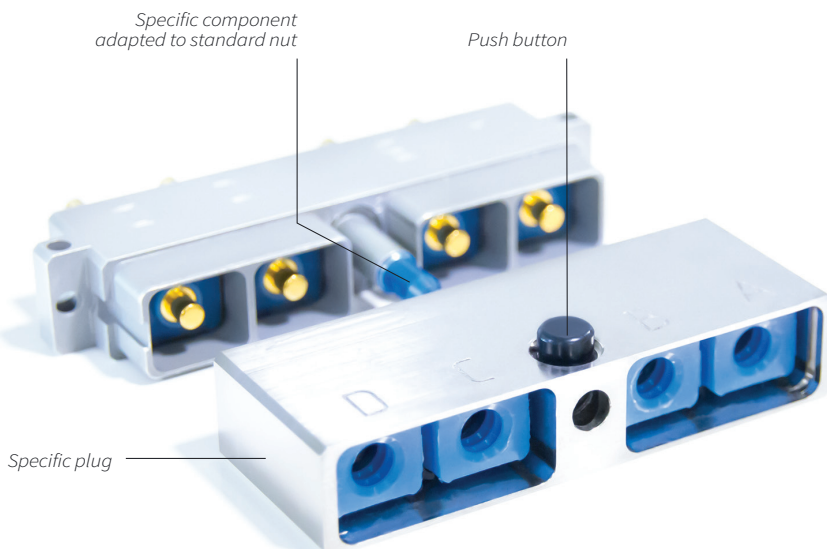

Nicomatic innovates and brings its special touch in I/O rectangular connectors:

- Mate/Unmate without using any tool
- Nicomatic kit : Plug + Nut Component, adapted to any standard EN 4165 receptacle
- Easier to operate in a handy and timely manner
- Saves assembly and maintenance time

Example of application: when connection/ disconnection cycles are high or when using the connector for test phases.

# CREATIVE INTERCONNECT SOLUTIONS

*With over 40 years of experience, Nicomatic combines a proven track record and continuous innovation.*

*We provide solutions for defense, security, energy, space, civil avionics, and many other applications, respecting our core values based on service, quality and close relationship with our customers.*

## HUMAN FACTOR

*is the key to success.*

*We promote initiative and responsibility,  
We encourage creativity & reactivity,  
To better meet your needs and anticipate your requirements.*

**Ready to join our team ?**

[recruitment@nicomatic.com](mailto:recruitment@nicomatic.com)

### HEADQUARTER

#### FRANCE

T: +33 (0)4 50 36 13 85  
[france@nicomatic.com](mailto:france@nicomatic.com)

MEMBER OF  
Gifas - Eden  
Aerospace cluster

### SUBSIDIARIES

#### UNITED STATES

T: +1 215 444 9580  
[usa@nicomatic.com](mailto:usa@nicomatic.com)

#### CHINA

T: +86 (0)22-23858836  
[china@nicomatic.com](mailto:china@nicomatic.com)

#### INDIA

T: +91 80 4213 1574  
[india@nicomatic.com](mailto:india@nicomatic.com)

#### DUBAI

[dubai@nicomatic.com](mailto:dubai@nicomatic.com)

#### UNITED KINGDOM

T: +44 (0)11 83 801033  
[uk@nicomatic.com](mailto:uk@nicomatic.com)

#### GERMANY

T: +49 (0)33203 878800  
[germany@nicomatic.com](mailto:germany@nicomatic.com)

#### TURKEY

T: +90 (0)312 504 37 29  
[turkey@nicomatic.com](mailto:turkey@nicomatic.com)

#### SOUTH KOREA

T: +82 (0)2 553 6822  
[korea@nicomatic.com](mailto:korea@nicomatic.com)

#### JAPAN

T: +81 (0)80 2138 0909  
[japan@nicomatic.com](mailto:japan@nicomatic.com)

#### SINGAPORE

T: +65 6262 1280  
[singapore@nicomatic.com](mailto:singapore@nicomatic.com)

#### TAIWAN

T: +886 (0)2 2311 2667  
[mailto:taiwan@nicomatic.com](mailto:mailto:taiwan@nicomatic.com)

#### CANADA

T: +41 (0)438 885 3395  
[canada@nicomatic.com](mailto:canada@nicomatic.com)



WEBSITE  
[nicomatic.com](http://nicomatic.com)